

PIU Wood Line Model 4.5 is a line of doors with an aluminium frame and wooden door leaf finished with lacquered in accordance with RAL colour chart or veneered in semi matte finish. Wooden door leaves of veneered or lacquered in a wide colour range are available in a maximum height of 240cm. Higher door leaves require execution in Aluminium Design technology, which guarantees stability and rigidity of the construction. This system is available in 2 types of thickness: model 4.5 and model 5.0. All the components needed for installation (i.e. hinges, magnetic lock, seal and assembly screws) are included in set.



PIU DOOR SYSTEM	aluminium frame and door-leaf made of wooden construction, veneered or lacquered
APPLICATION	Inner door
SIZE	Height: from 202 up to 240cm / width: 70, 80, 90 cm
FRAME CONSTRUCTION	Model 4.5, multi-chamber aluminium structure of exceptionally high rigidity; used on masonry walls or on plasterboard walls
OPENING TYPES	2 types of door frame: opening inwards (type A), opening outwards (type B) – giving the possibility flushed to wall door leads despite the different opening directions; in case of different opening directions the door height is always the same on the side where the door are flushed with wall
DOOR-LEAF CONSTRUCTION	Enhanced wooden construction
DOOR-LEAF THICKNESS	45 mm
DOOR-LEAF FINISHING	Finished with lacquered from RAL/NCS colour chart or veneered in semi matte finish
LOCK	Concealed magnetic lock; able to adjust for any possible type of locking: handle, master-key, toilet, patent lock
HINGES	Concealed, with adjustment in 3 dimensions. The door opens outwards, with an opening range of up to 180°
SEALS	Rubber seals in colours: white, black, brown and grey
TECHNICAL DOCUMENTATION	<ul style="list-style-type: none"> • Technical Approval ITB for the door system AT-15-8578/2011 • Certificate for hinges according to PN-EN 1935:2003 • Acoustic certificate confirming superior sound insulation properties (32dB)
COUNTRY OF ORIGIN	Poland
MANUFACTURER	PIU Design Sp. z o.o.

Chart 1 – FRAME HEIGHT CHART – MODEL 4.5:
TYPE A – opening inwards and TYPE B – opening outwards

STANDARD HEIGHT (cm) A i B	FRAME OPENING HEIGHT Ha (cm)		FRAME TOTAL HEIGHT Hb (cm)		HOLE IN THE WALL Hc (cm)	
	A	B	A	B	A	B
202 cm	202	200,8	206,4	206,2	209	209
210 cm	210	208,8	214,4	214,2	217	217
220 cm	220	218,8	224,4	224,2	227	227
230 cm	230	228,8	234,4	234,2	237	237
240 cm	240	238,8	244,4	244,2	247	247

Chart 2 – FRAME WIDTH CHART – MODEL 5.0:
TYPE A – opening inwards and TYPE B – opening outwards

STANDARD WIDTH (cm)	FRAME OPENING WIDTH (cm)	FRAME TOTAL WIDTH (cm)		HOLE IN THE WALL (cm)	
		TYPE A	TYPE B	TYPE A	TYPE B
70 cm	70	78,8	80,8	82	84
80 cm	80	88,8	90,8	92	94
90 cm	90	98,8	100,8	102	104

GUIDELINES FOR DOOR FRAME ASSEMBLY

The frame should be mounted on the initial building stage (or renovation)

- In the masonry wall** size of the door apertures must be adjusted according to the height and width charts for the proper door frame type. An installation of the doorframe in the hole should predict the surface of door flushed to wall. The frame should be mounted in the appropriate level, predicting the height of the finished floor. Mounting anchors, used for installation in pre-prepared doorways, as well as plaster mesh for installation under the plaster on the flushed to wall side, are delivered in set with the door frame. Doorways should have a margin, circa 10cm without plaster in order to install in it a plaster mesh. Foam for installation and insulation, added to the frame, should be applied locally in order to immobilise the frame during the mounting. Then the clearance between the frame and the wall should be filled with mortar in order to gain a rigid connection between the frame and the wall.
- In the plasterboard wall** there must be made a door aperture construction from profiles intended for door mounting. Steel profile for door frames (UA stud) must be installed according to the size of the appropriate type of the door frame, ceiling and floor to acquire it's rigidity. The frame should be mounted in the appropriate level, predicting the height of the finished floor. The wall cannot be closed with plasterboard in order to have the possibility of tightening the doorframe on the inner side with self-drilling screws, that gives the mounted frame it rigidity. Foam for installation and insulation should be applied along edges of the frame, between the frame and the wall. While mounting plasterboards, the edges contacting with frame should be cut at the angle of 45-50° from the flushed to wall side. Interlining should be used on the edges of the frame

FINISHING THE DOOR FRAME

Aluminium primer coat and complete set of materials needed for mounting the frame are included in in the doorframe set.

Fig. 3 – SCHEME OF FRAME HEIGHT DIFFERENCE TYPE A AND TYPE B

In order of having the same visible door height on the flushing with the wall side, with different opening direction doors, opening height and the frame is lower by 12 mm with the door opening outwards (TYPE B)

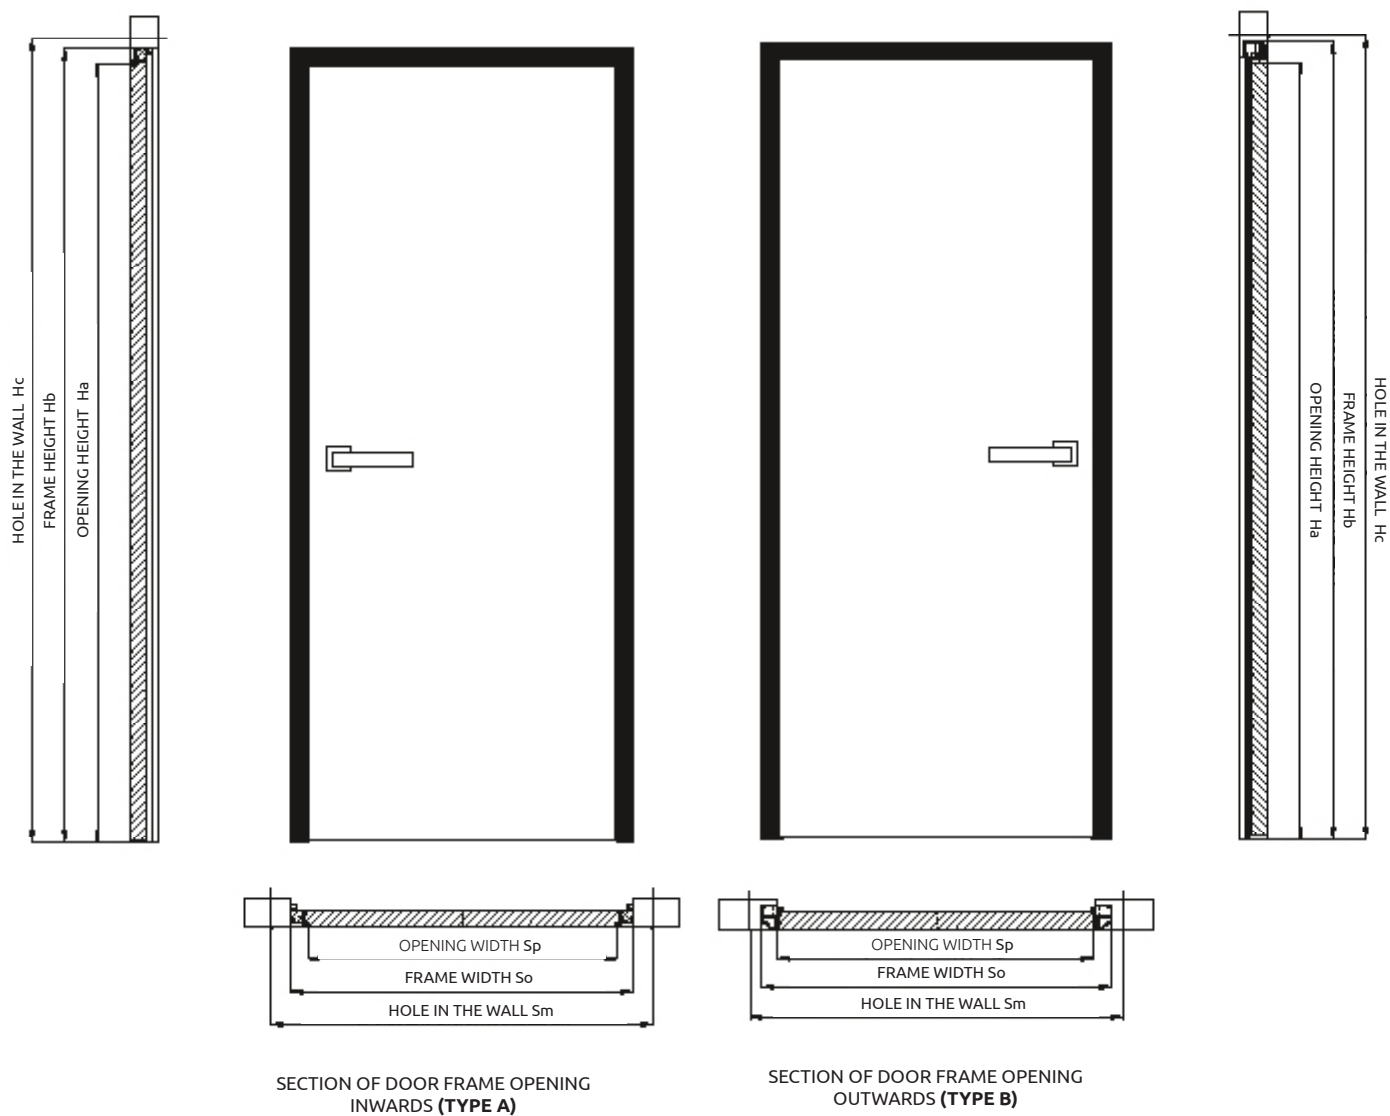


Fig. 4 – PIU DOORS OPENING DIRECTIONS ACCORDING TO FRAME TYPE A I TYPE B



* in situation of joint floors, connection should be made 2,5cm from the flushed in the wall side into the interior of the room